

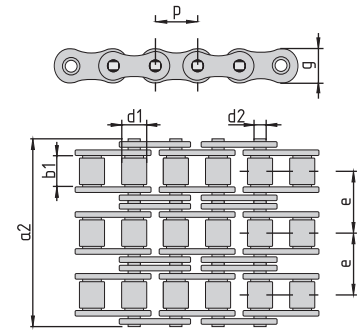


## **ŁAŃCUCHY ROLKOWE**



- łańcuchy rolkowe (szerokie zastosowanie w maszynach i urządzeniach, technice transportowej, rolnictwie, maszynach do pakowania i maszynach drukarskich)

# ŁAŃCUCHY ROLKOWE WG EUROPEJSKIEJ NORMY



## JEDNORZĘDOWE

ISO	podziałka P		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	F <sub>B</sub> min N	q [kg/m] ≈
	mm	cale							
04-1	6,00	-	2,80	1,85	4,00	7,40	5,00	3.000	0,12
05B-1	8,00	-	3,00	2,31	5,00	8,60	7,11	4.600	0,18
06B-1 ▲	9,525	3/8"	5,72	3,28	6,35	13,50	8,26	9.100	0,41
081-1 ▲	12,70	1/2"	3,30	3,63	7,75	9,80	9,60	8.000	0,28
083-1 ▲	12,70	1/2"	4,88	4,08	7,75	12,30	10,30	12.000	0,42
084-1	12,70	1/2"	5,01	4,08	7,75	14,30	10,00	16.000	0,49
08B-1 ▲	12,70	1/2"	7,75	4,45	8,51	17,00	11,81	18.200	0,70
10B-1 ▲	15,875	5/8"	9,65	5,08	10,16	19,60	14,73	22.700	0,95
12B-1 ▲	19,05	3/4"	11,68	5,72	12,07	22,70	16,13	29.500	1,25
16B-1	25,40	1"	17,02	8,28	15,88	36,10	21,08	58.000	2,70
20B-1	31,75	1 1/4"	19,56	10,19	19,05	43,20	26,42	95.000	3,60
24B-1	38,10	1 1/2"	25,40	14,63	25,40	53,40	33,40	170.000	6,70
28B-1	44,45	1 3/4"	30,99	15,90	27,94	65,10	37,08	200.000	8,30
32B-1	50,80	2"	30,99	17,81	29,21	67,40	42,29	260.000	10,50
40B-1	63,50	2 1/2"	38,10	22,89	39,37	82,60	52,90	355.000	16,99




## DWURZĘDOWE

ISO	podziałka P		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	e mm	F <sub>B</sub> min N	q [kg/m] ≈
	mm	cale								
05B-2	8,00	-	3,00	2,31	5,00	14,30	7,11	5,64	7.800	0,34
06B-2	9,525	3/8"	5,72	3,28	6,35	23,80	8,26	10,24	17.300	0,78
08B-2	12,70	1/2"	7,75	4,45	8,51	31,00	11,81	13,92	31.800	1,35
10B-2	15,875	5/8"	9,65	5,08	10,16	36,20	14,73	16,59	45.400	1,85
12B-2	19,05	3/4"	11,68	5,72	12,07	42,20	16,13	19,46	59.000	2,50
16B-2	25,40	1"	17,02	8,28	15,88	68,00	21,08	31,88	110.000	5,40
20B-2	31,75	1 1/4"	19,56	10,19	19,05	79,70	26,42	36,45	180.000	7,20
24B-2	38,10	1 1/2"	25,40	14,63	25,40	101,80	33,40	48,36	324.000	13,50
28B-2	44,45	1 3/4"	30,99	15,90	27,94	124,70	37,08	59,56	381.000	16,60
32B-2	50,80	2"	30,99	17,81	29,21	126,00	42,99	58,55	495.000	21,00
40B-2	63,50	2 1/2"	38,10	22,89	39,37	154,00	52,90	72,29	630.000	33,61

## TRZYRZĘDOWE

ISO	podziałka P		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	e mm	F <sub>B</sub> min N	q [kg/m] ≈
	mm	cale								
06B-3	9,525	3/8"	5,72	3,28	6,35	34,00	8,26	10,24	25.400	1,20
08B-3	12,70	1/2"	7,75	4,45	8,51	44,90	11,81	13,92	45.400	2,00
10B-3	15,875	5/8"	9,65	5,08	10,16	52,80	14,73	16,59	68.100	2,80
12B-3	19,05	3/4"	11,68	5,72	12,07	61,70	16,13	19,46	88.500	3,80
16B-3	25,40	1"	17,02	8,28	15,88	99,90	21,08	31,88	165.000	8,00
20B-3	31,75	1 1/4"	19,56	10,19	19,05	116,10	26,42	36,45	270.000	11,00
24B-3	38,10	1 1/2"	25,40	14,63	25,40	150,20	33,40	48,36	485.000	21,00
28B-3	44,45	1 3/4"	30,99	15,90	27,94	184,30	37,08	59,56	571.000	25,00
32B-3	50,80	2"	30,99	17,81	29,21	184,50	42,99	58,55	743.000	32,00

# ŁAŃCUCHY ROLKOWE WG AMERYKAŃSKIEJ NORMY

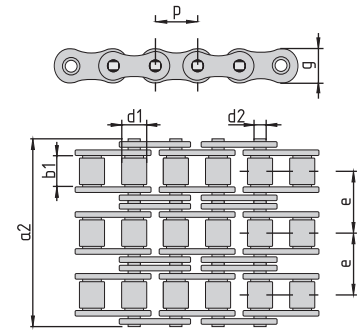

## JEDNORZĘDOWE

kod	ANSI	podziałka P		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	F <sub>B</sub> min N	q [kg/m] ≈
		mm	cale							
D0036	35-1	9,525	3/8"	4,77	3,58	5,08	13,20	9,05	8.000	0,31
D0037	40-1	12,70	1/2"	7,95	3,96	7,92	17,80	12,07	13.790	0,61
D0038	50-1	15,875	5/8"	9,53	5,08	10,16	21,80	15,09	21.800	1,01
D0039	60-1	19,05	3/4"	12,70	5,94	11,91	26,90	18,08	31.140	1,58
D0040	80-1	25,40	1"	15,88	7,92	15,88	33,50	24,13	55.600	2,36
D0041	100-1	31,75	1 1/4"	19,05	9,53	19,05	41,10	30,18	86.740	3,80
D0042	120-1	38,10	1 1/2"	25,40	11,10	22,23	50,80	36,20	125.000	5,40
D0043	140-1	44,45	1 3/4"	25,40	12,70	25,40	54,90	42,24	170.400	7,30
D0044	160-1	50,80	2"	31,75	14,27	28,58	65,50	48,26	222.400	9,90
D0045	60-1H	19,05	3/4"	12,70	5,94	11,91	31,20	18,08	31.140	1,81
D0046	80-1H	25,40	1"	15,88	7,92	15,88	38,00	24,13	55.600	3,00
D0047	100-1H	31,75	1 1/4"	19,05	9,53	19,05	45,40	30,18	86.740	4,38

## DWURZĘDOWE

ANSI	podziałka P		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	e mm	F <sub>B</sub> min N	q [kg/m] ≈
	mm	cale								
35-2	9,525	3/8"	4,77	3,58	5,08	21,60	9,05	10,13	16.000	0,67
40-2	12,70	1/2"	7,95	3,96	7,92	32,30	12,07	14,38	27.580	1,19
50-2	15,875	5/8"	9,53	5,08	10,16	39,90	15,09	18,11	43.600	1,70
60-2	19,05	3/4"	12,70	5,94	11,91	49,80	18,08	22,78	62.280	3,14
80-2	25,40	1"	15,88	7,92	15,88	62,70	24,13	29,29	111.200	4,90
100-2	31,75	1 1/4"	19,05	9,53	19,05	77,00	30,18	35,76	173.480	7,60
120-2	38,10	1 1/2"	25,40	11,10	22,23	96,30	36,20	45,44	250.000	10,80
140-2	44,45	1 3/4"	25,40	12,70	25,40	103,60	42,24	48,87	340.800	14,30
160-2	50,80	2"	31,75	14,27	28,58	124,20	48,26	58,55	444.800	19,40

## TRZYRZĘDOWE

ANSI	podziałka P		b1 mm min	d2 mm	d1 mm max	a2 mm max	g mm max	e mm	F <sub>B</sub> min N	q [kg/m] ≈
	mm	cale								
35-3	9,525	3/8"	4,77	3,58	5,08	31,80	9,05	10,13	24.000	1,01
40-3	12,70	1/2"	7,95	3,96	7,92	46,70	12,07	14,38	41.370	1,78
50-3	15,875	5/8"	9,53	5,08	10,16	57,90	15,09	18,11	65.400	3,08
60-3	19,05	3/4"	12,70	5,94	11,91	72,60	18,08	22,78	93.420	4,70
80-3	25,40	1"	15,88	7,92	15,88	91,70	24,13	29,29	166.800	7,50
100-3	31,75	1 1/4"	19,05	9,53	19,05	113,00	30,18	35,76	260.220	11,20
120-3	38,10	1 1/2"	25,40	11,10	22,23	141,70	36,20	45,44	375.000	16,10
140-3	44,45	1 3/4"	25,40	12,70	25,40	152,40	42,24	48,87	511.200	21,40
160-3	50,80	2"	31,75	14,27	28,58	182,90	48,26	58,55	667.200	29,10